

Direct Outdoor Airflow Measurement Device



GREEN MARK

Provide Direct Outdoor Airflow Measurement Devices with accuracy of $\pm 10\%$ of the minimum outdoor airflow

NRB 2015 4.1b(i) (Up to 1 point)


- All Precool Units OR – 0.5 point
- All AHUs/FCUs – 1 point

ENRB 2017 5.8 (Up to 2 points)

- All Precool Units – 1 point
- >90% of all AHUs/FCUs – 1 point



THERMAL DISPERSION AIRFLOW / TEMPERATURE MEASUREMENT DEVICE

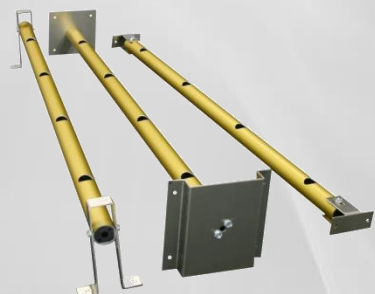




Occupancy-Based Sensing Counter



GREEN MARK 2015

THERMAL IMAGING DOOR OCCUPANCY COUNTER

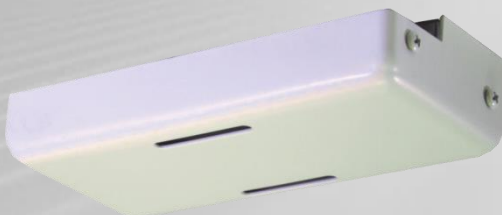

UP TO 3 POINTS

4.3b ACMV / LIGHTING DEMAND CONTROL

Occupancy-based sensing:

Control is exercised based on measured occupancy (number of occupants)

≥80% of applicable transient areas

- **ACMV Demand Control – 1 point**
- **Lighting Demand Control – 0.5 point**

≥80% of applicable occupied areas

- **ACMV Demand Control – 1 point**
- **Lighting Demand Control – 0.5 point**